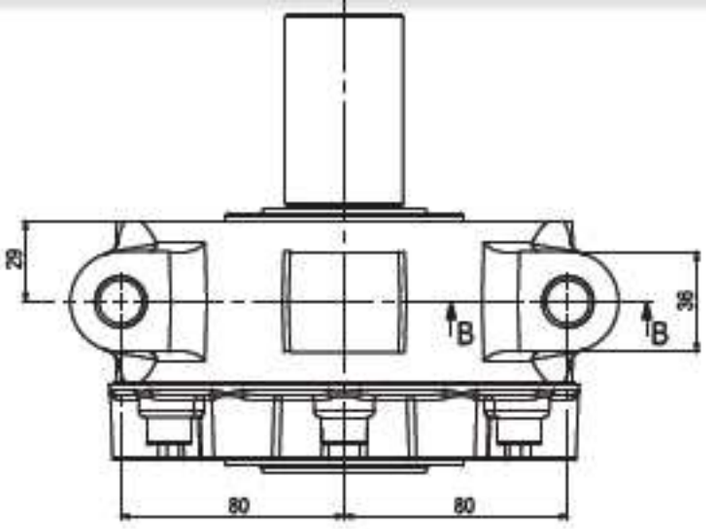

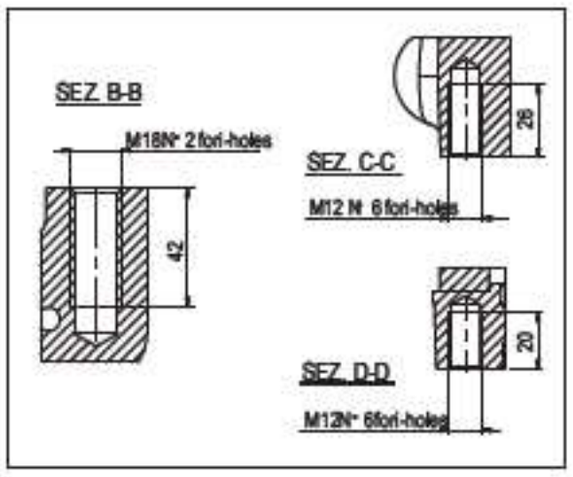

The SU/Universal is suitable for driving a variety of pumps, motors, with belts, chain or other transmission, in which heavy combined loads take place.
Flanges and couplings are required to connect the hydraulic pump or motor.

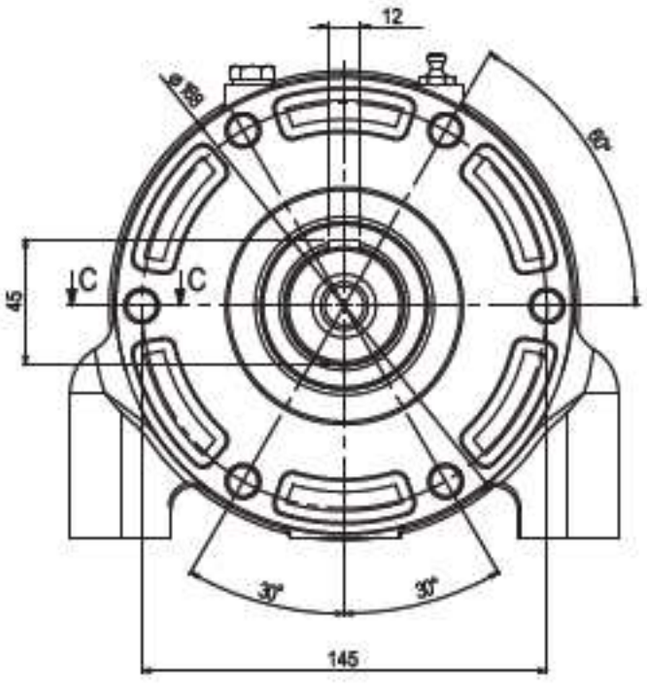

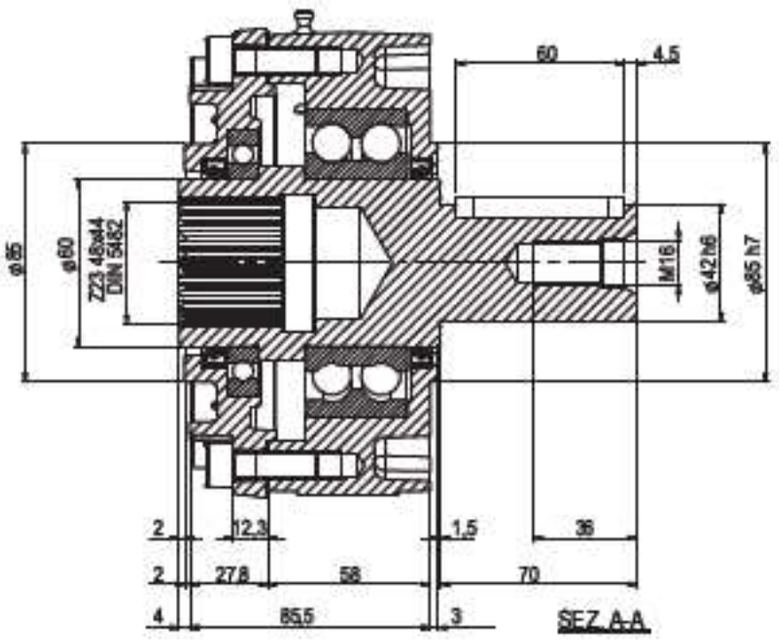

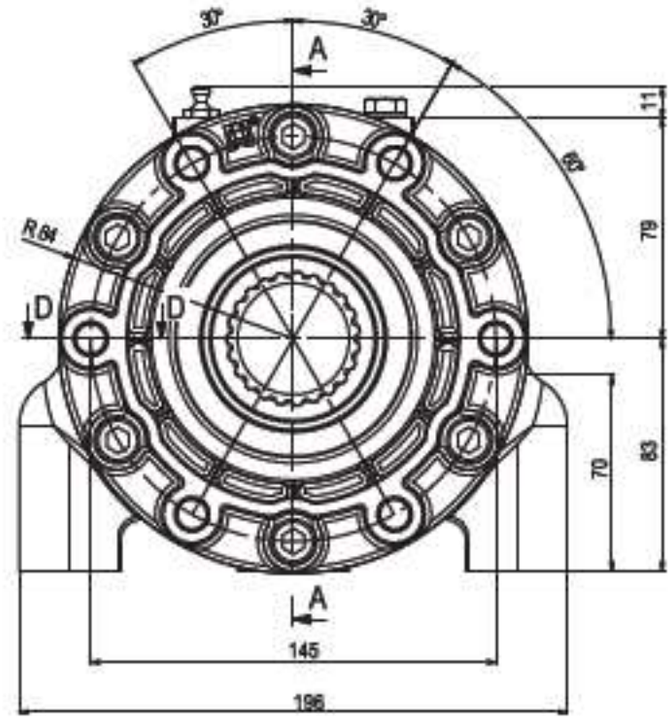

MAXIMUM LOAD ON THE SHAFT

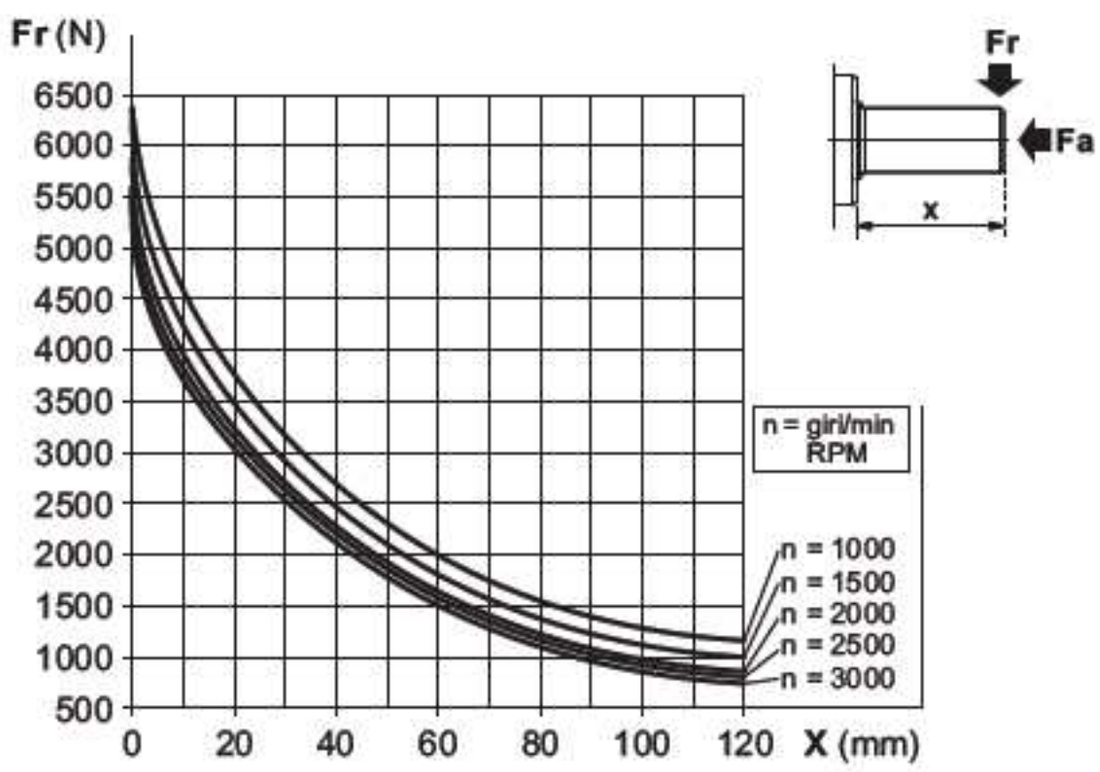

FEATURES

Minimum radial load (*)	Fr = 450 N
Radial load (*)	See graphic
Axial load (*)	Fa ≤ Fr • 0,8
Max. revolutions per minute	3500 RPM
Life (*)	3500 hours
Max. working temperature	70 °C
Grease quantity	81 ÷ 118.5 gr
Type of grease	DIN 51818 NLGI classe 2
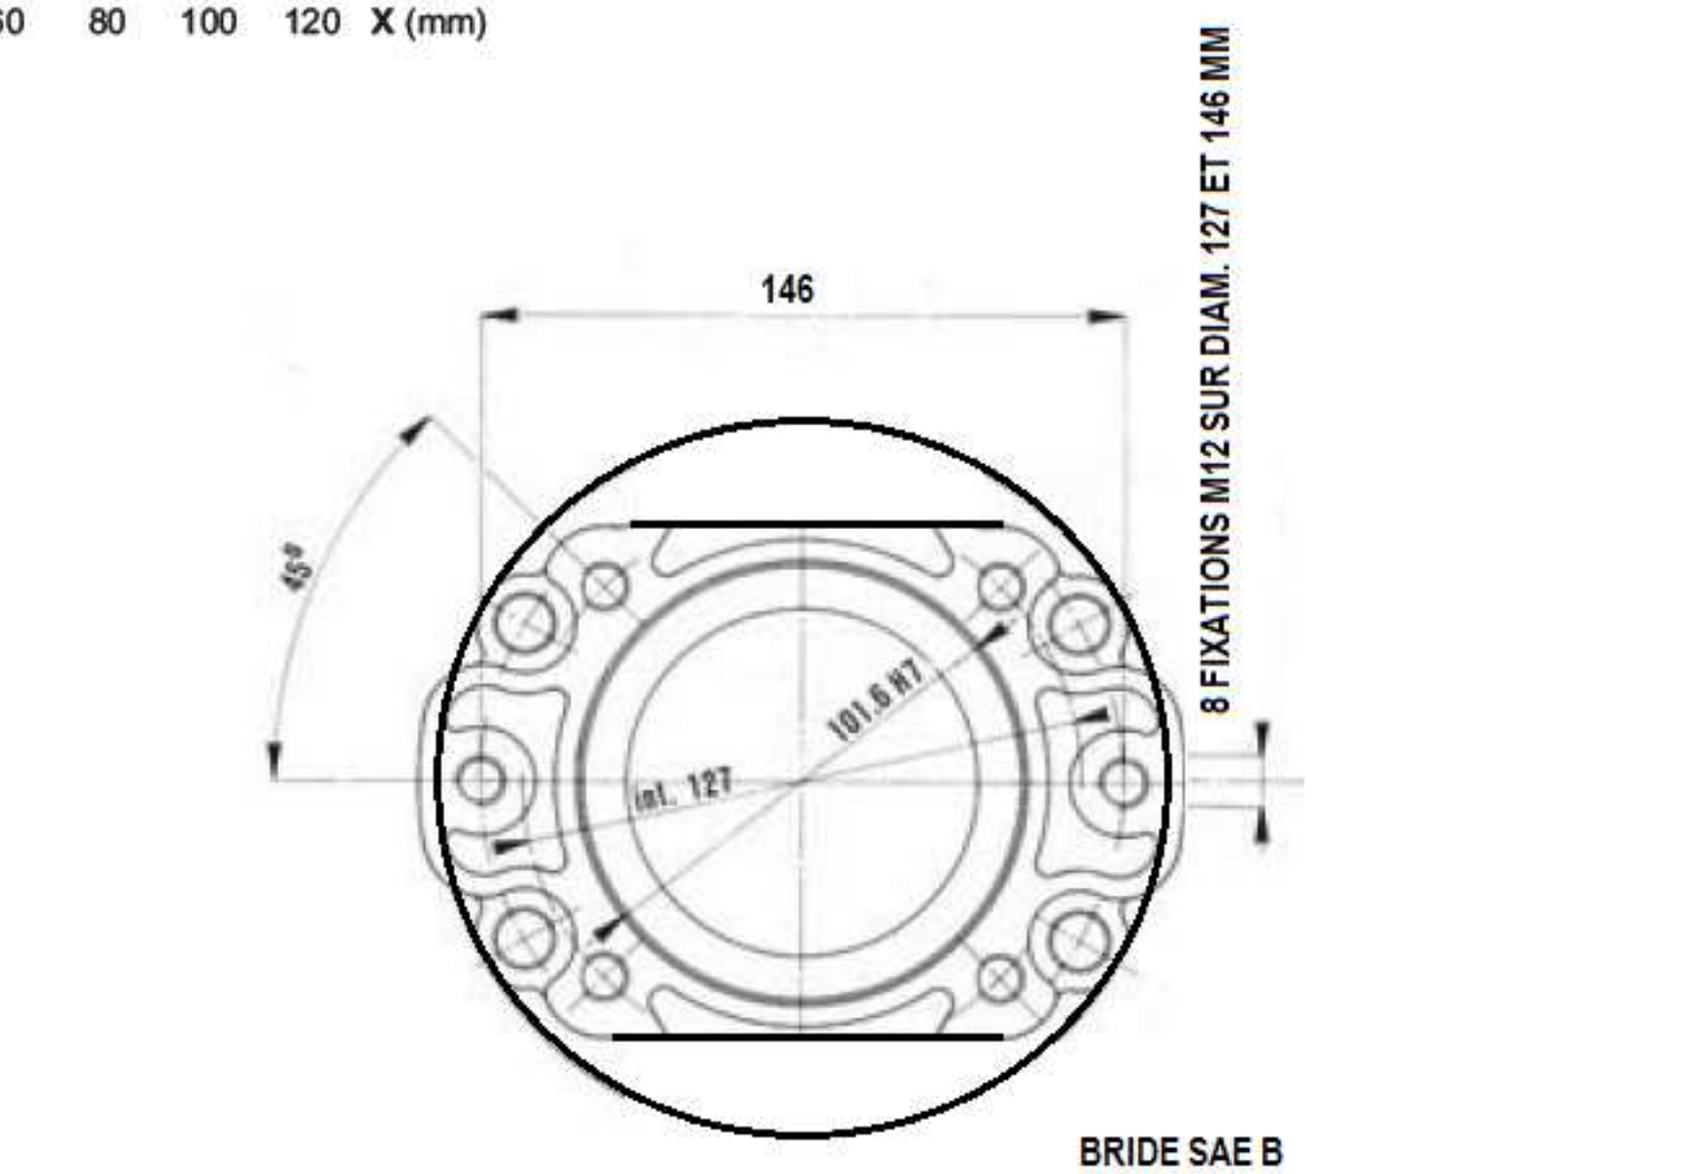
(*) Nominal values calculated according to ISO 281. For more information, contact our thecnical department.